

# PF Clamp



**LIFETIME  
WARRANTY**  
ON BROKEN PARTS

The unique design of the PF Clamp gives an extremely strong clamp for fit-up of all types of pipes and fittings in both Carbon Steel and Stainless Steel.

All contact points of the clamp is stainless steel and the bolts are galvanized with a stainless steel ball-point to ensure perfect fit-up

Cat. No.	Range (inch)	Range (mm)	Weight (kg)	Weight (lbs)
PF13	1 - 3	25 - 80	1,10	2,20
PF26	2 - 6	50 - 170	3,20	6,40
PF614	6 - 14	150 - 360	8,20	16,00

# WT Steel Clamp



**LIFETIME  
WARRANTY  
ON BROKEN PARTS**

This series of robust forged Steel Clamps is designed for Pipe to Pipe or Pipe to Fittings. The WT Steel Clamps are electro galvanized, and assure fast and effective clamping.


The Butterfly Screws are made with Stainless Steel Balls, this eliminates scratching of the object to be welded and corrosion will not occur.

The Clamp is made of sink forged steel. This gives enough clamping force to comply with the demands for all the pipe dimensions within the WT Steel Clamps range of 25-355 mm (1"-14").

WT Steel Clamp can be used for the welding of steel pipes. Stainless Sleeves can be mounted on the WT Steel Clamp so it can be used for Stainless Steel, Duplex and other high alloy steel types.

Cat. No.	Range (inch)	Range (mm)	Weight (kg)	Weight (lbs)
SC13	1 - 3	26 - 76	1,5	3
SC25	2 - 5	51 - 127	3,1	6,2
SC47	4 - 7	102 - 177	3,3	6,6
SC59	5 - 9	127 - 228	6,9	13,8
SC1014	10 - 14	254 - 355	8,8	17,6

# WT Clamp

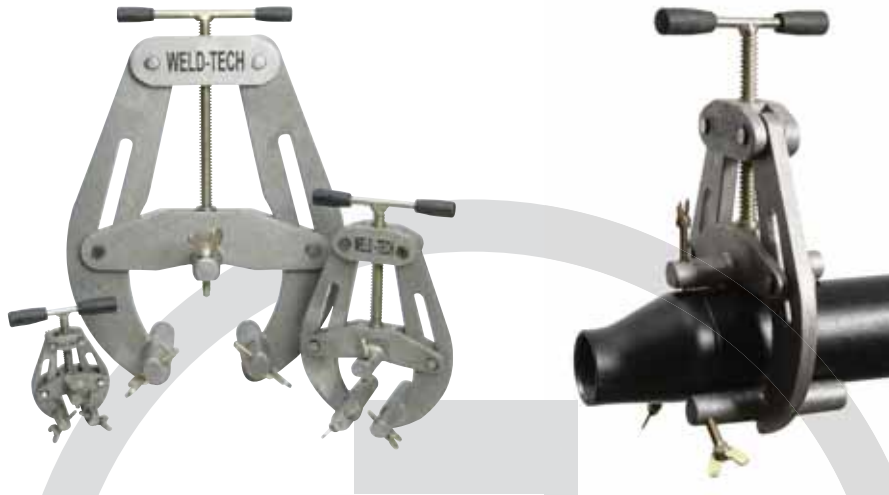

**LIFETIME  
WARRANTY  
ON BROKEN PARTS**

Due to its unique design, WT Clamp ensures that the clamping forces are evenly spread round the pipe to be welded, because the distance between clamping points are exactly the same. This is true for all pipe dimensions within the range of the WT Clamp (1 to 14 inches).

The adjusting screws have stainless steel balls at their ends. This eliminates the scratching of the objects to be welded, and no corrosion will occur.

The arms are made of casted aluminium which allows a clamping force to meet the requirements for all pipe dimensions within the range of the WT Clamp (27 – 355 mm) and with wall thickness of up to 15 mm.

WT Clamp can be used for the welding of all kinds of materials such as carbon steel, stainless steel, duplex, super duplex and titanium.

The welding of pipe to pipe and pipe to fittings are easily performed with WT Clamp.

Cat. No.	Range (inch)	Range (mm)	Weight (kg)	Weight (lbs)
WT125	1 - 2,5	27 - 64	0.75	1,50
WT26	2 - 6	60 - 168	2.60	5,20
WT612	6 - 14	168 - 355	7.50	15,00